





**FM-14WS**  
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer Audio Feast

**Wiring Connection**




	2.5k	3.5k	5k	7k	Pri.Zp(Ω)
Blue		16			Sec.Zs(Ω)
Purple	8		16		
Gray	6	8		16	
White	4	6	8		
Yellow		4	6	8	
Black	COM				

Output 14W(50Hz)  
 Freq. Response 14~60kHz(DC60mA 3.5k-8Ω -3dB)  
 Pri. Inductance 18H(1kHz)  
 Pri. DCR 160Ω      Sec. DCR 1.15Ω (3.5k-16)  
 Pri. max DC Current 90mA  
 Dimension 80x71x120(H)mm    Black hammered metal case, or Urushi finish  
 Mounting Screw 64x55 4-M4mm

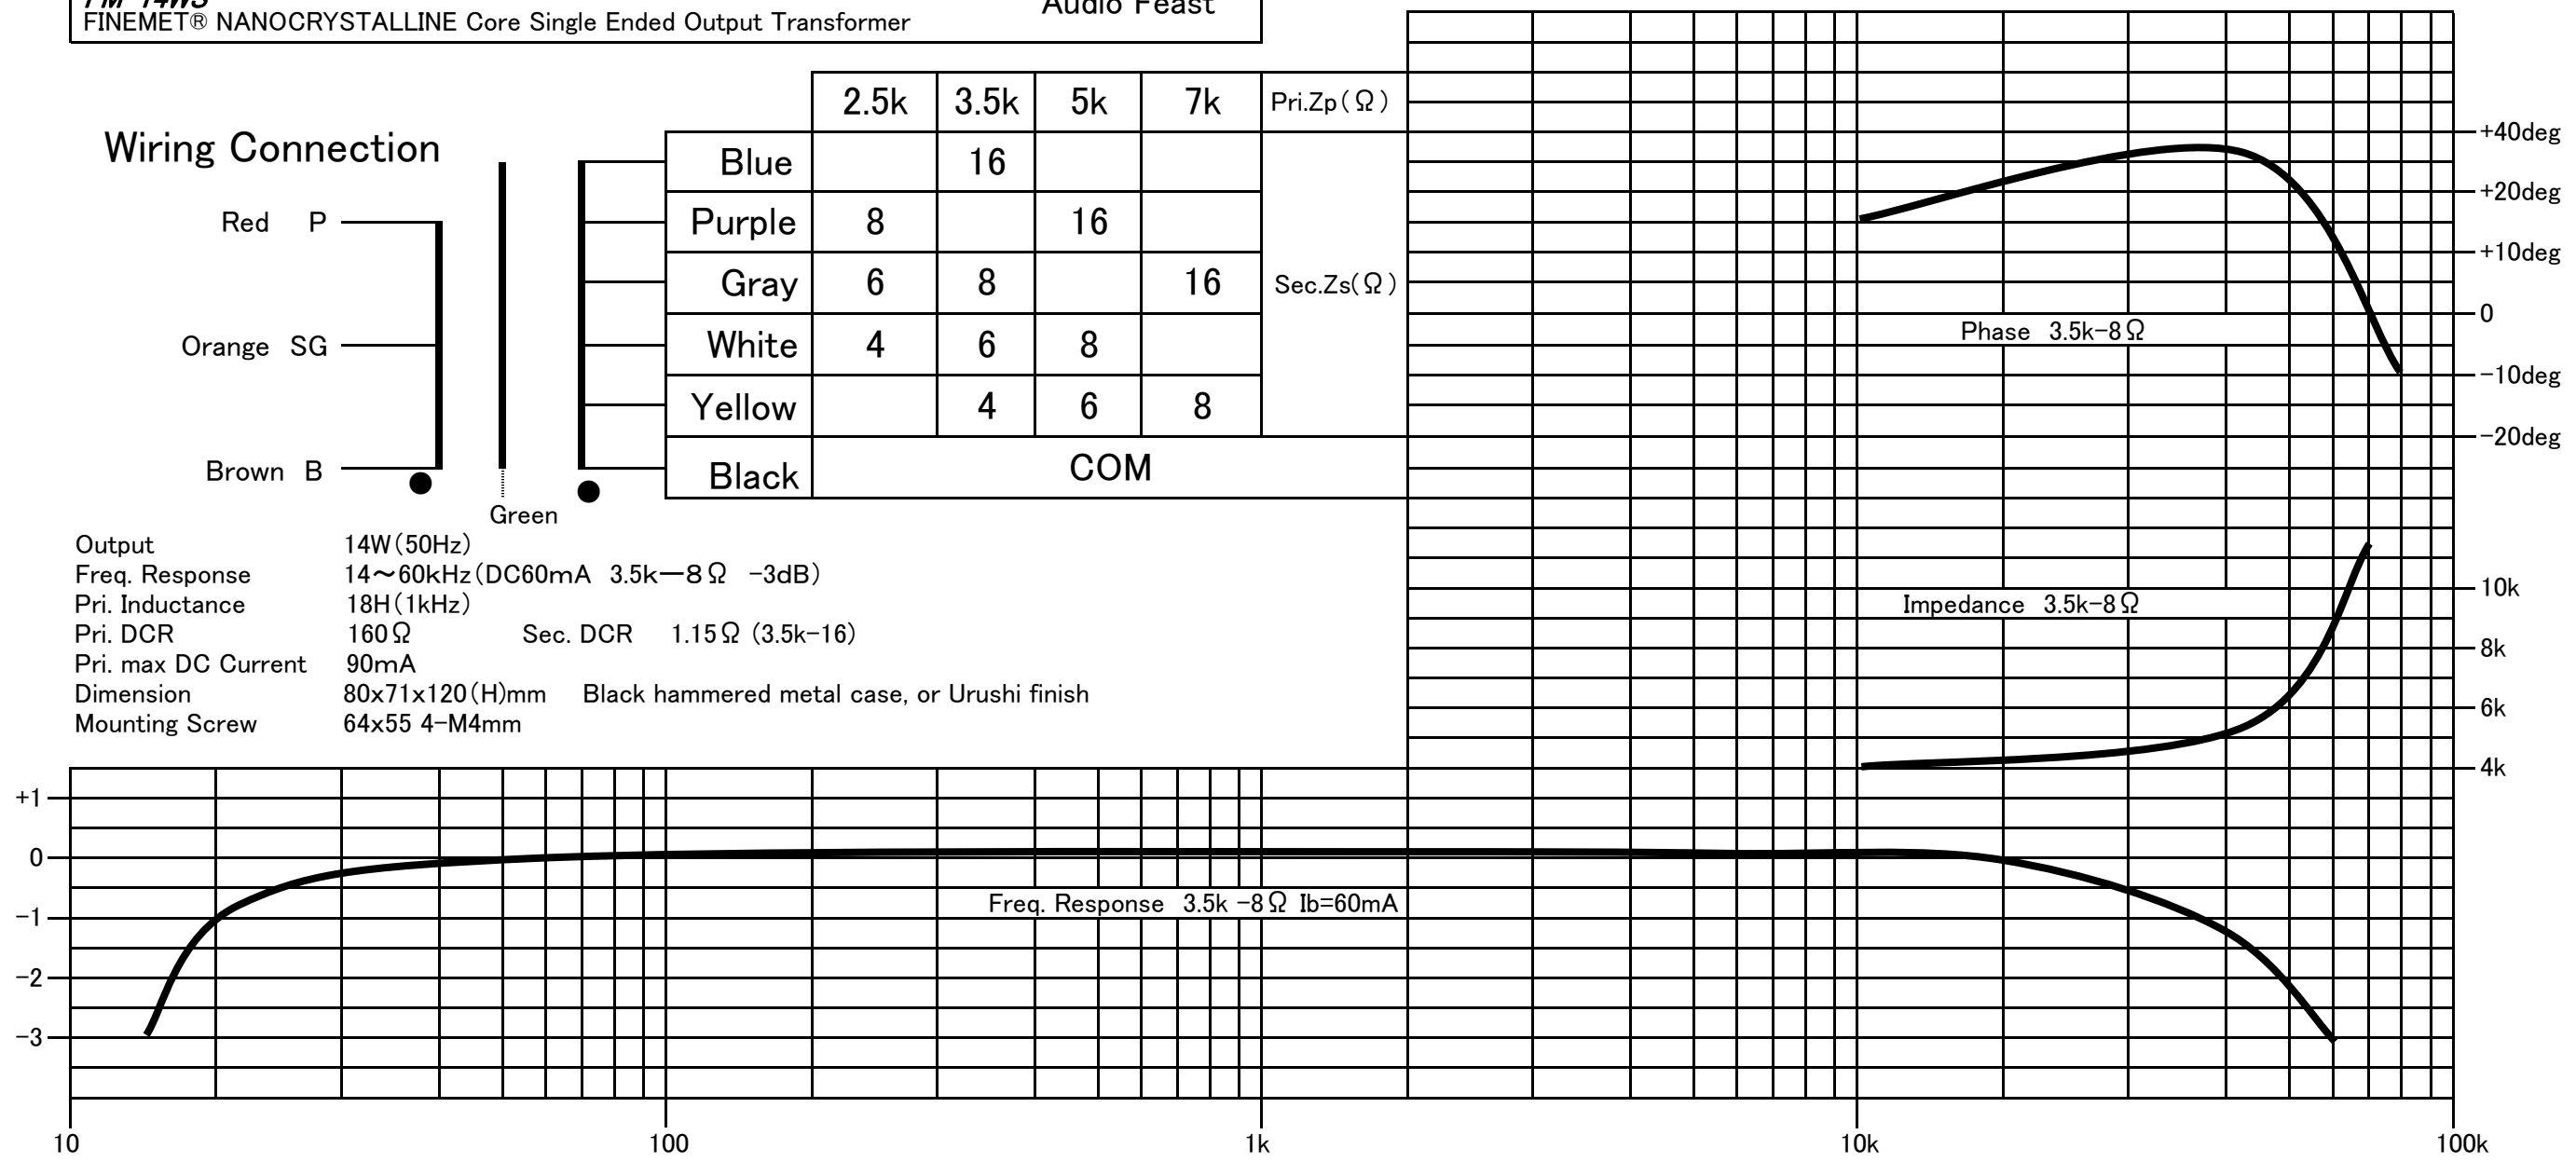

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)  
 Web: [TheAudioFeast.com](http://TheAudioFeast.com)  
 Distributed by Audio Feast (Nashville, TN, USA)  
 Final finish by Teramoto (Myoko, Japan)  
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR  
Urushi finish

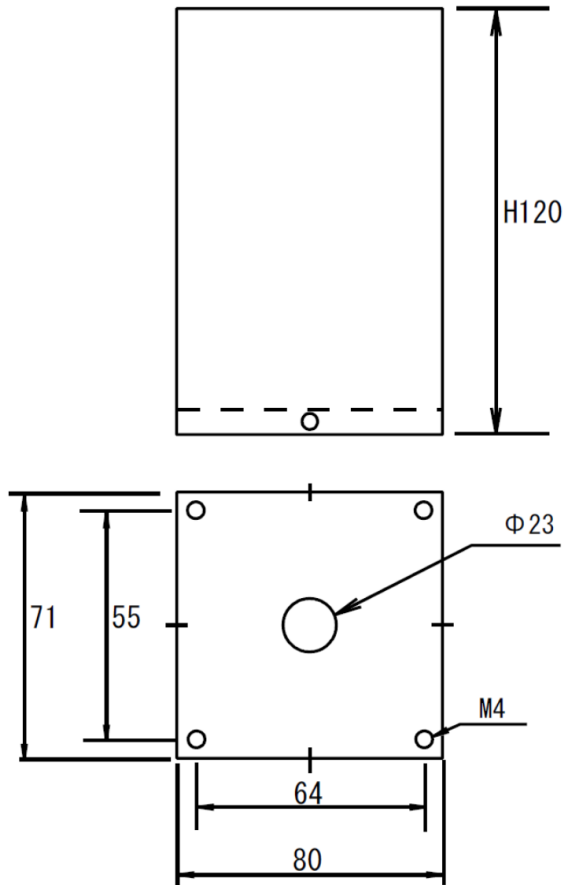

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

