




FM-3WS-L
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer Audio Feast

Wiring Connection

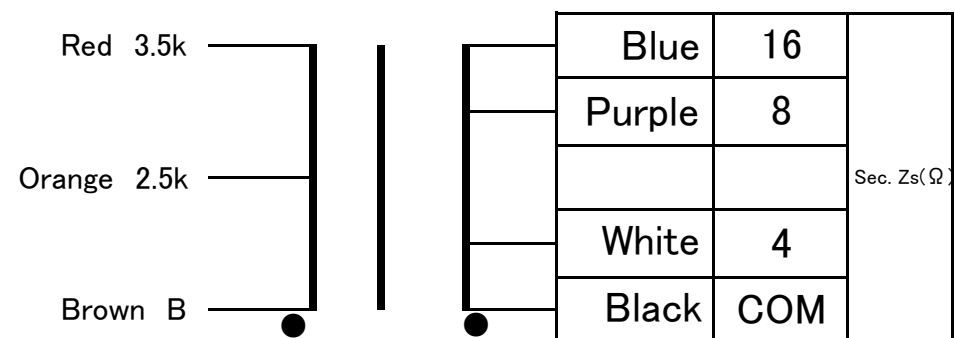

FM-3WS

Output 3W(70Hz)
 Freq. Response 25~50kHz(DC20mA 3.5k—8Ω -3dB)
 Pri. Inductance 10H(3.5k) 7H(2.5k) 1kHz 20mA
 Pri. DCR 188Ω(3.5k) 163Ω(2.5k) Sec. DCR 1.43Ω(16Ω)
 Pri. max DC Current 45mA(3.5k) 55mA(2.5k)
 Dimension 65x50x65(H)mm No Case, Urushi finish is available



Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)