




**FMC-HW**  
FINEMET® NANOCRYSTALLINE Core Choke

Audio Feast

Wiring Connection

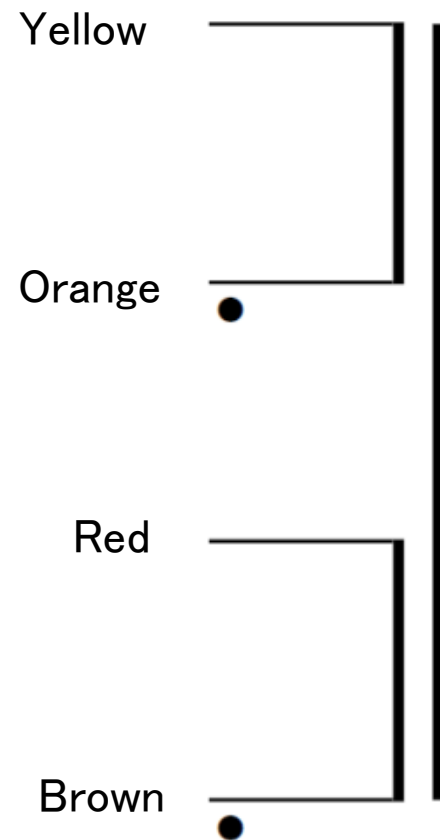

<b>FMC-1016HW</b>		<b>Maximum Current</b>	<b>DCR</b>
10H	(H) Series	160mA	128 ohm
2.5H	Parallel	320mA	32 ohm
Dimension		56x50x90(H)mm	

<b>FMC-0534HW</b>		<b>Maximum Current</b>	<b>DCR</b>
5H	Series	340mA	58 ohm
1.25H	Parallel	680mA	14.5 ohm
Dimension		63x63x100(H)mm	

<b>FMC-1520HW</b>		<b>Maximum Current</b>	<b>DCR</b>
15H	Series	200mA	164 ohm
3.75H	Parallel	400mA	41 ohm
Dimension		63x63x100(H)mm	

<b>FMC-1025HW</b>		<b>Maximum Current</b>	<b>DCR</b>
10H	Series	200mA	120 ohm
2.5H	Parallel	400mA	30 ohm
Dimension		63x63x100(H)mm	

<b>FMC-6060HW</b>		<b>Maximum Current</b>	<b>DCR</b>
60H	Series	60mA	730 ohm
15H	Parallel	120mA	182.5 ohm
Dimension		58x50x90(H)mm	

<b>FMC-3285HW</b>		<b>Maximum Current</b>	<b>DCR</b>
32H	Series	85mA	432 ohm
8H	Parallel	170mA	108 ohm
Dimension		56x50x90(H)mm	

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)  
 Web: [TheAudioFeast.com](http://TheAudioFeast.com)  
 Distributed by Audio Feast (Nashville, TN, USA)  
 Final finish by Teramoto (Myoko, Japan)  
 Designed by General Ind. (Saitama, Japan)