




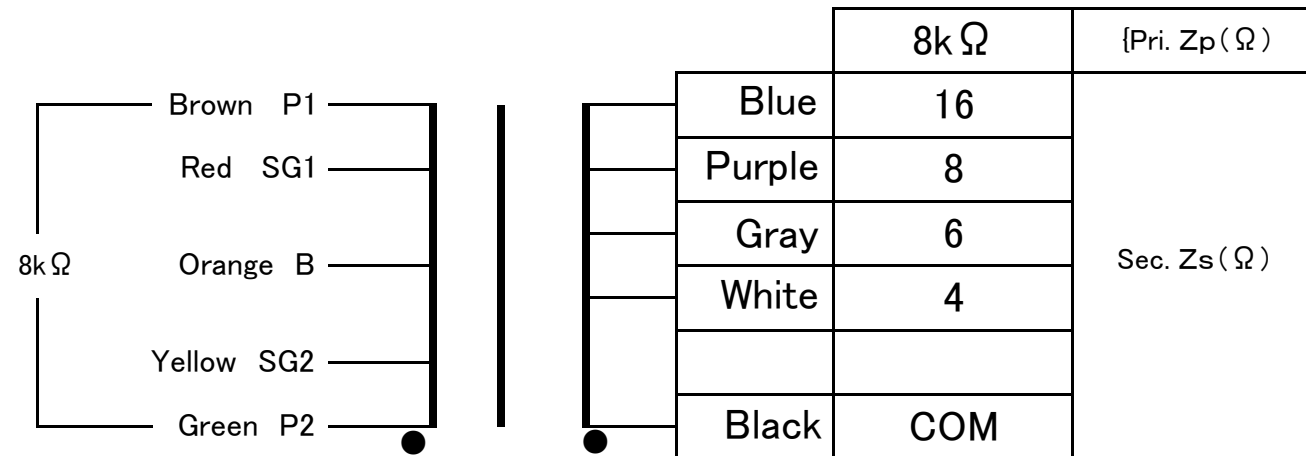

FM-45P-8K Audio Feast
 FINEMET® NANOCRYSTALLINE Core Push Pull Output Transformer


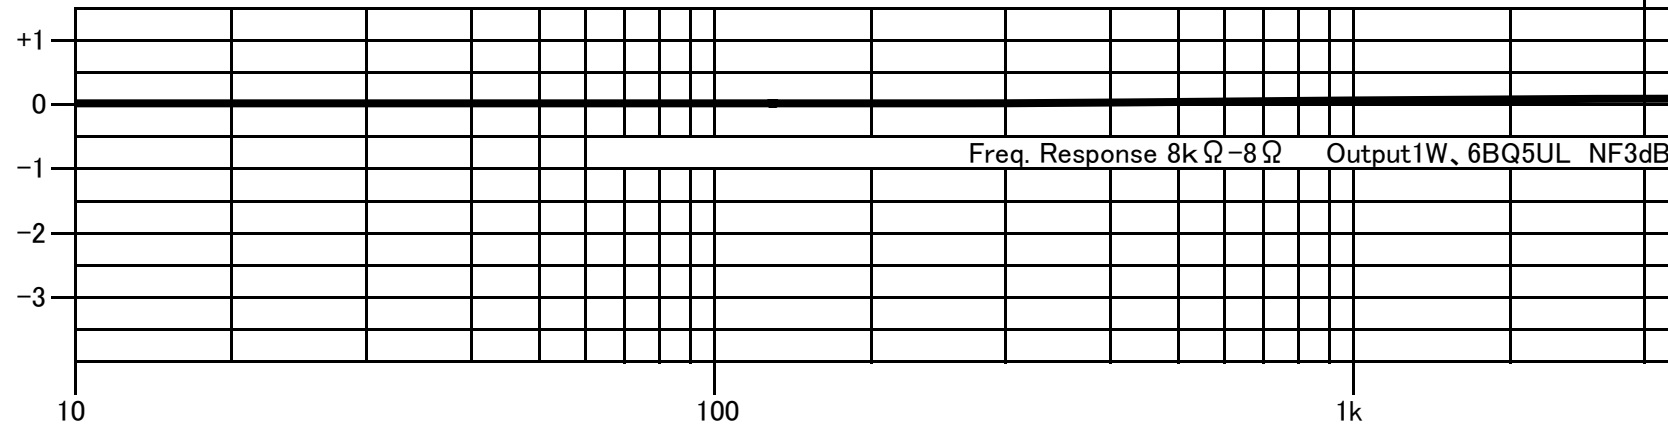


Output 45W(50Hz 8k-8Ω)
 Freq. Rrsponse 5~40kHz(8k-8Ω -1dB)
 Pri. Inductance 830H max(10Hz)
 Pri. DCR P1-B(107Ω)/B-P2(107Ω), Sec. DCR Com-16Ω(0.55Ω)
 Pri. max DC Current 300mA(2 tubes), max unbalance Current 5mA, Loss 0.26dB(16Ω)
 Dimension 100x90x120(H)mm Black hammered metal case, or Urushi finish
 Mounting Screw 80x70mm 4-M5

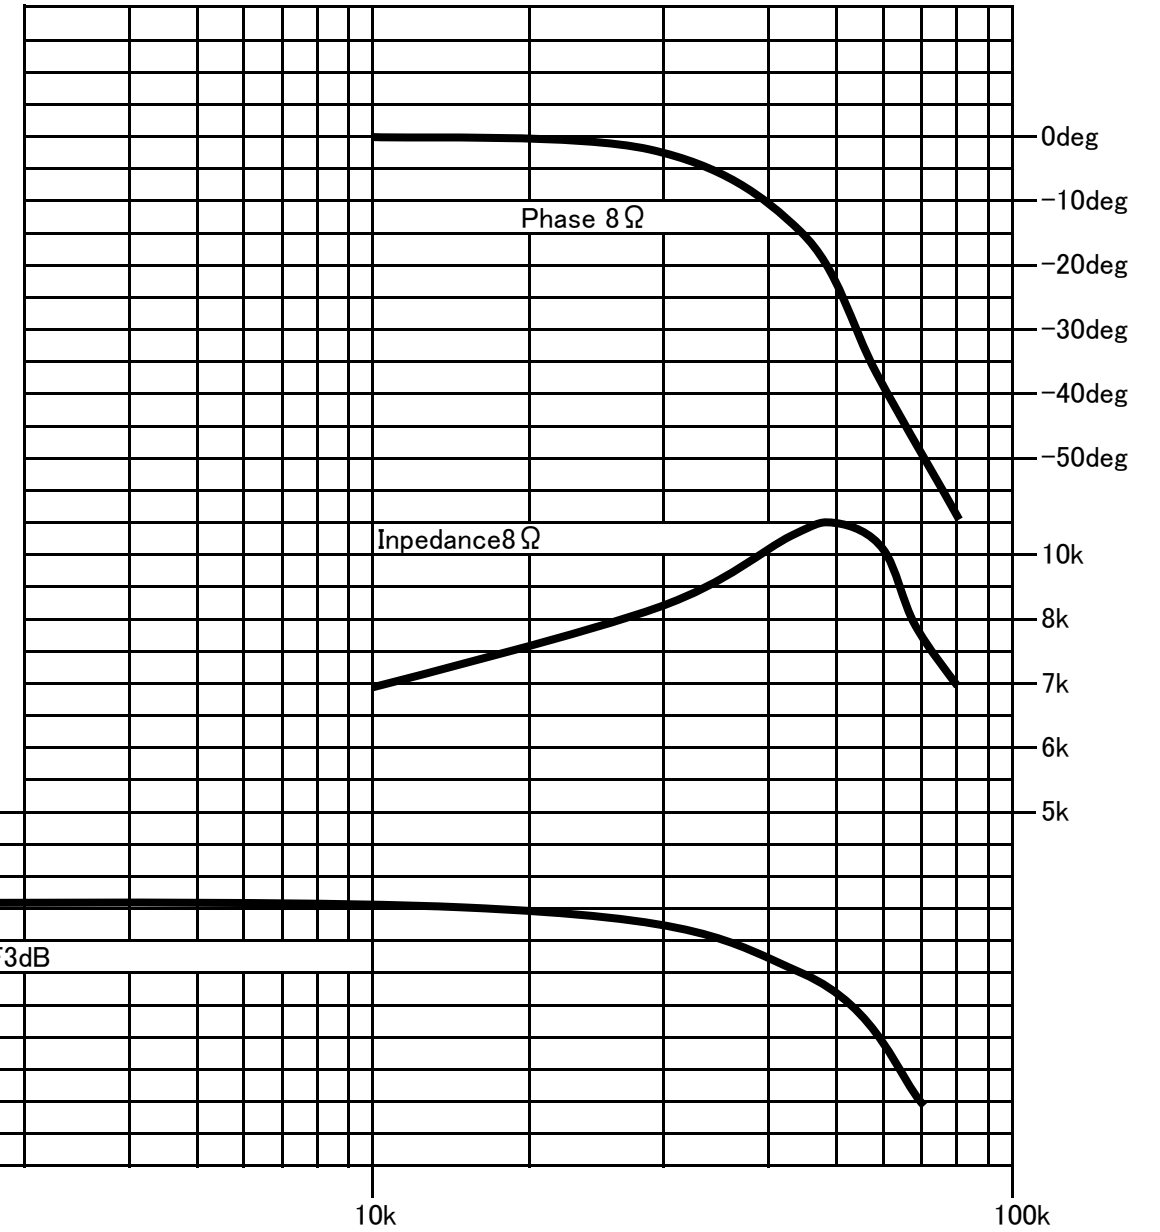

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR
Urushi finish

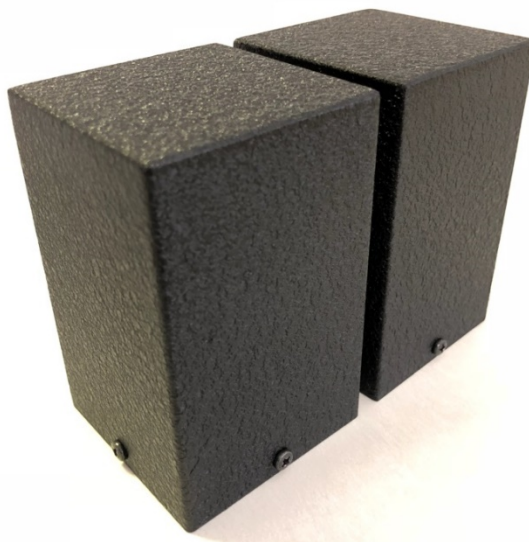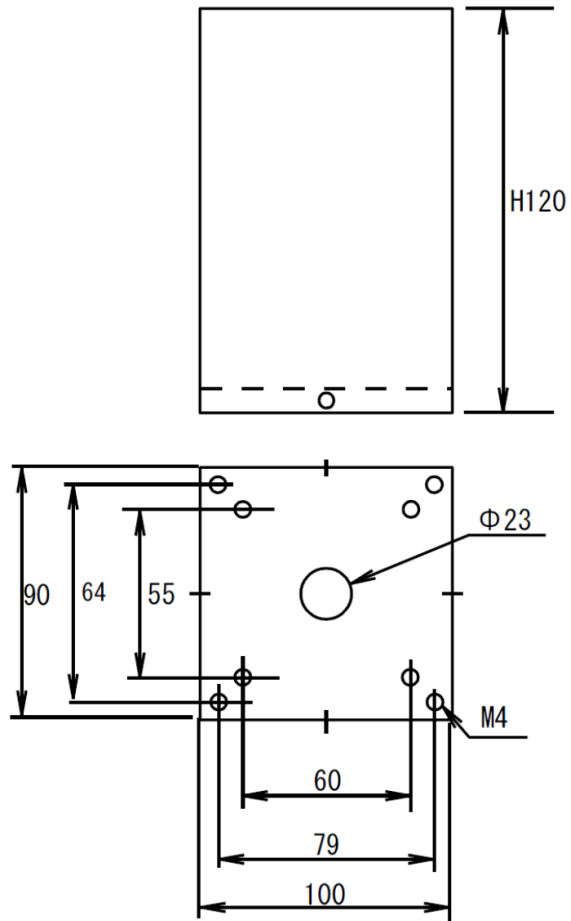

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

